

mdi ClariSure PL cartridge filters are very high flow rate, high retention efficiency, large area filtration devices of 100% polypropylene construction.

These filters are ideal for applications requiring filtration of very large volumes of fluid without compromising on the filtrate quality

Special Features

- High retention efficiency (**99.99%**)
- Very high flow rates
- Non media migrating
- Wide chemical compatibility
- High heat resistance

Complies with USFDA 21 CFR 210.3(b)(6)

Meets and Exceeds USFDA 21 CFR 177.1520



Applications


- Filtration of organic solvents in non sterile API
- Bottle washing in oral formulations
- Clarifications of buffers
- Process water
- Dyes and chemicals

Specifications

Construction				
Pore size	1µm, 2.5µm, 5µm, 10µm			
Filter Media	Polypropylene			
Support Layers	Polypropylene			
Body and Core	Polypropylene			
Size				
Size	5"	10"	20"	30"
Effective Filtration Area (Nominal)	2500cm ²	5000cm ²	10000cm ²	15000cm ²
Operational				
Max. Operating Temperature	80 °C @ < 30 psi (2 Kg/cm ²)			
Max. Differential Pressure	50 psi (3.5 Kg/cm ²) @ 25 °C			
Assurance				
Toxicity	Passes Bioreactivity test, In Vivo, as per USP <88> for Class VI plastics			
Non Fiber Releasing	Passes test as per USP and comply with USFDA 21 CFR Part 210.3(b)(6) for fiber release			
Extractables with WFI	Passes test as per USP			
Oxidizable Substances	Within limits as specified in USP			
Particle Shedding	Passes USP test for particulates in injectables.			
Indirect Food Additive	All Polypropylene components meet the FDA Indirect Food Additive requirements cited in 21 CFR 177.1520			
Good Manufacturing Practice	These products are manufactured in a facility which adheres to Good Manufacturing Practices.			
Quality Management System	ISO-9001:2008 Certified			
USFDA	DMF No. 015554			

Water Flow Rates

ClariSure PL, 10" Cartridge Filters

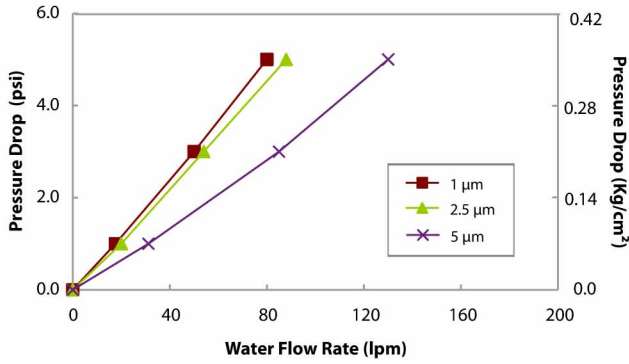

Ordering Information

Type		Size		Pore Size		Adaptor		Elastomer		Sterility		Pack Size	
	Code	Length and filtration Area	Code		Code		Code		Code		Code		Code
CPPL	CPPL	5"	53	1 µm	05	7P	A0	Silicone	SS	Non Sterile	1	1	01
		10"	54	2.5 µm	06	'0'	D0	EPDM	SE				
		20"	55	5 µm	07	BEO	B0	Viton	SV				
		30"	56	10 µm	08			PTFE	ST				
				20 µm	11			FEP	FV*				
								Encapsulated Viton					

Example

CPPL	54	07	A0	SS	1	01
------	----	----	----	----	---	----

* FV is available in Code A0 (7P) only



Gesfilter, S.L.

Distribuidor Oficial España

Avenida Cerdanyola, 92-94 Local B4

08173 - Sant Cugat del Vallès - Barcelona

Tel: 935921554 - Email: comercial@gesfilter.com

www.gesfilter.com

Advanced Microdevices Pvt. Ltd.

20-21, Industrial Area, Ambala Cantt-133 006, INDIA

Tel : +91-171-2699290, 2699471 Fax : +91-171-2699221

E-mail : info@mdimembrane.com Internet : www.mdimembrane.com