

**mdj** AseptiSure NS Nylon-66 membrane mini cartridge filters are sterilizing grade filters offering absolute retention and wide chemical compatibility. These filters offer serial filtration for enhanced throughput. The upstream layer is of larger pore size to protect the downstream final filtration layer.

## Special Features

- Absolute retention
- Minimal extractables
- High heat resistance
- Wide chemical compatibility
- Biologically inert
- Hydrophilic
- Each filters comes with an individual Certificate of quality
- Total Traceability:  
Unique identification number is laser etched on each filter

Microbially Validated as per ASTM F 838-05

Complies with USDFA 21 CFR 210.3(b)(6)

Meets and Exceeds USDFA 21 CFR 177.1520



## Applications

- Sterilization of compatible solvents and chemicals
- Sterilization of disinfectants in pharmaceutical labs and process areas
- Filtration of hospital disinfectants
- Filtration of rinse water for endoscopes and other hospital equipments
- Sterilizing filtration of pharmaceutical, aqueous and non aqueous solutions


## Specifications

Construction		
Final Filter Pore Size	0.2µm	0.45µm
Prefilter Pore Size	0.8 µm, 0.45 µm	0.8 µm
Membrane	Nylon-66	
Support Layers	Polyester	
Body and Core	Polypropylene	
Integrity Testing / Retention		
Microbial Bacterial Retention (LRV >7 for)	Brevundimonas diminuta (ATCC 19146) per cm <sup>2</sup>	Serratia marcescens (ATCC 14756) per cm <sup>2</sup>
Size		
Size	2.5"	5"
Effective Filtration Area (Nominal)	1000cm <sup>2</sup>	2000cm <sup>2</sup>
Operational		
Max. Operating Temperature	80 °C @ < 2 Kg/cm <sup>2</sup> (30 psi)	
Max. Differential Pressure	< 3.5Kg/cm <sup>2</sup> (50 psi) @ 25°C	
Reverse Pressure	< 0.7 Kg/cm <sup>2</sup> (10 psi) @ 25 °C	
Sterilization	Autoclavable/In-line Steam Sterilizable at 121 °C for 30 minutes	

Assurance	
Toxicity	Passes Bioreactivity test, In Vivo, as per USP <88> for Class VI plastics
Bioburden	Bioburden level is < 1000 cfu/filter device as per ANSI/AAMI/ISO 11737-1 : 1995
Bacterial Endotoxin	Aqueous extracts exhibit < 0.25 EU/ml as established by Limulus Amebocyte Lysate (LAL) Test
Non Fiber Releasing	Passes test as per USP and comply with USFDA 21 CFR Part 210.3(b)(6) for fiber release
Oxidizable Substances	Within limits as specified in USP
Particle Shedding	Passes USP test for particulates in injectables.
TOC/Conductivity at 25 °C	Meets the WFI requirements of USP <643> for Total Organic Carbon and USP <645> for Water Conductivity after a specified volume of purified water flush
Indirect Food Additive	All Polypropylene components meet the FDA Indirect Food Additive requirements cited in 21 CFR 177.1520
Good Manufacturing Practice	These products are manufactured in a facility which adheres to Good Manufacturing Practices.
Quality Management System	ISO-9001:2008 Certified
USFDA	DMF No. 015554

## Water Flow Rates

0.2µm AseptiSure NS, Cartridge Filters

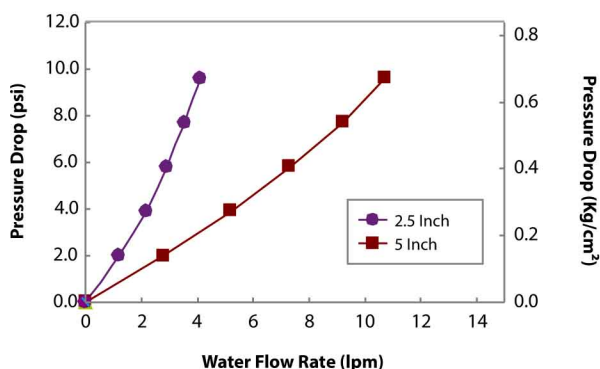

## Ordering Information

Type		Size		Pore Size		Adaptor		Elastomer		Sterility		Pack Size	
	Code		Code		Code		Code		Code		Code		Code
Aseptisure NS (0.45 µm Upstream)	CPNX	2.5"	50	0.2 µm	01	4463	E0	Silicone	SS	Non Sterile	1	1	01
Aseptisure NS (0.8 µm Upstream)	CPN5	5"	53	*0.45 µm	02	4463B	H0						
						4440	U0						

\*0.45µm cartridge filter are available with 0.8µm upstream layer only

### Example

CPNX	50	01	E0	SS	1	01
------	----	----	----	----	---	----



## Gesfilter, S.L.

Distribuidor Oficial España

Avenida Cerdanyola, 92-94 Local B4

08173 - Sant Cugat del Vallès - Barcelona

Tel: 935921554 - Email: comercial@gesfilter.com

www.gesfilter.com

## Advanced Microdevices Pvt. Ltd.

20-21, Industrial Area, Ambala Cantt-133 006, INDIA

Tel : +91-171-2699290, 2699471 Fax : +91-171-2699221

E-mail : info@mdimembrane.com Internet : www.mdimembrane.com